

# Butler Touch

## Butler Flex Package

For Models MS90 to MSSUPER3

### Box Contents

- TempoTouch Control
- AutoFlush
- Condensation Pan

Note: When ordering with the linear steamhead, standard steamhead are replaced with 104480 Linear



### FOR ILLUSTRATIVE PURPOSES ONLY. IMPORTANT NOTE: FOR SAFE AND TROUBLE FREE INSTALLATION

visit [mrsteam.com](http://mrsteam.com) before installation to download the Installation, Operation and Maintenance Manual or refer to the manual provided with the unit.

| MODEL                    |  | PROJECT INFORMATION |               |
|--------------------------|--|---------------------|---------------|
| <input type="checkbox"/> |  | Location:           | Contractor:   |
|                          |  | Architect:          | Submitted By: |
|                          |  | Engineer:           | Date:         |
| Notes:                   |  |                     |               |



### TempoTouch® Control

TempoTouch control must be surface mounted in the steam/shower enclosure through a 1-1/8" [28.5mm] diameter hole.

#### TempoTouch Control Feature:

- Solid decorative bezel with choice of designer finishes
- Touch ON/OFF button
- Arc swipe to change temperature
- Steamhead in matching finish
- Temperature Setting Indicator

The TempoTouch control are designed to be installed inside or outside the steam room but is primarily installed inside the steam room. If the control is installed inside the steam room the control must be located:

- 4-5 ft. (1.2 – 1.5m) above the floor
- in a location representative of the desired steam bathing temperatures. Do not locate the control above or near the steam head or direct steam emissions
- on a vertical wall.

The control cable length is 30 ft. [9m]. Insure that the control and/or steam generator are located accordingly.


An optional 60 ft. [18m] cable is available if required, PN 104678-60.

If the control is installed outside the steam room a Remote Temperature Probe Part Number MSTS must be installed inside the steam room.

#### BOX CONTENTS:

- TempoTouch
- Steamhead
- Control Cable (30 ft.) (9m)
- Tube of Silicone Sealant
- Owner's Manual

#### Dimensions for Round & Square Controls:

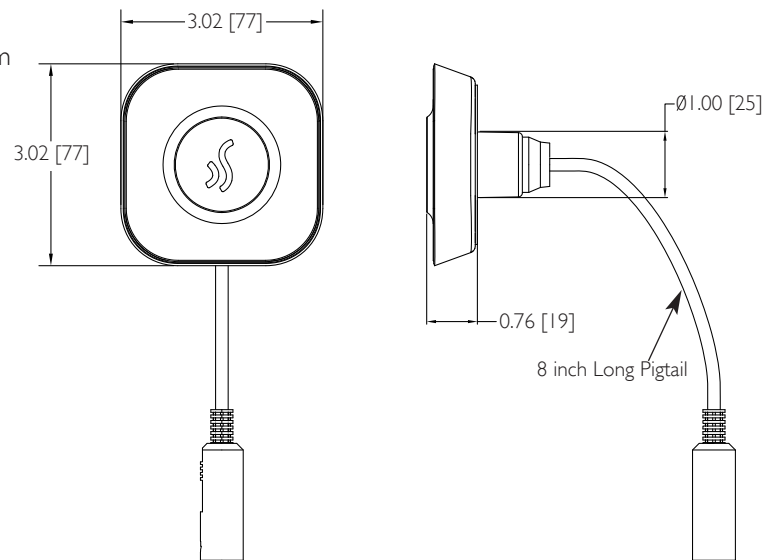

#### FOR ILLUSTRATIVE PURPOSES ONLY. IMPORTANT NOTE: FOR SAFE AND TROUBLE FREE INSTALLATION


visit [mrsteam.com](http://mrsteam.com) before installation to download the Installation, Operation and Maintenance Manual or refer to the manual provided with the unit.

| MODEL      | FINISH                                           |                                               | PROJECT INFORMATION |
|------------|--------------------------------------------------|-----------------------------------------------|---------------------|
| TempoTouch | <input type="checkbox"/> BB - Brushed Bronze     | <input type="checkbox"/> PC - Polished Chrome | Location:           |
|            | <input type="checkbox"/> BL - Brilliant Black    | <input type="checkbox"/> PG - Polished Gold   | Architect:          |
|            | <input type="checkbox"/> BN - Brushed Nickel     | <input type="checkbox"/> PN - Polished Nickel | Engineer:           |
|            | <input type="checkbox"/> MB - Matte Black        | <input type="checkbox"/> SB - Satin Brass     | Contractor:         |
|            | <input type="checkbox"/> NB - Nouveau Bronze     | <input type="checkbox"/> ST - Satin Steel     | Submitted By:       |
|            | <input type="checkbox"/> ORB - Oil Rubbed Bronze | <input type="checkbox"/> WH - White Finish    | Date:               |
|            | <input type="checkbox"/> PB - Polished Brass     |                                               |                     |
| Notes:     |                                                  |                                               |                     |

## AromaSteam Steamhead

(3/4" NPT)

- Even distribution of steam while remaining cool to the touch
- No field assembly required
- No moving parts
- Integrated aromatherapy oil well for in shower use

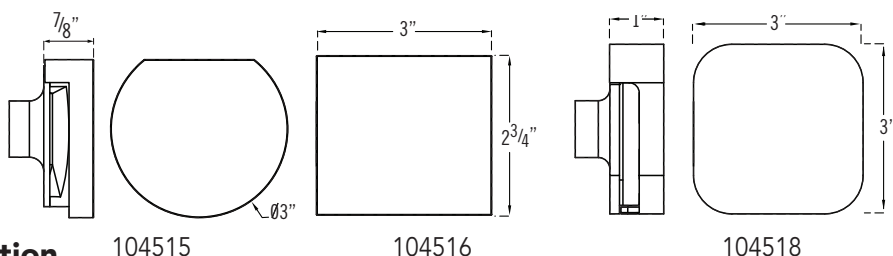

### Round & Square Steamhead Installation

(3/4" NPT)


**IMPORTANT: DO NOT** disassemble steamhead. MrSteam's steam head is shipped fully assembled and requires no additional assembly.

**CAUTION** Because the steamhead and direct steam emissions are very hot, locate the steamhead where incidental contact by bather with the steamhead or direct steam emission cannot occur.

**NOTE:** A 1.5" clearance hole around the steam pipe is needed to mount the steamhead. Locate steamhead 6-12 inches above floor, except for:

- Tub/shower enclosures, install 6 inches above tub top edge.
- For enclosures with acrylic or other non-heat resistant flooring install Acrylic Shield Part Number 103938 /10398SQ

**IMPORTANT NOTE:** To preserve steamhead finish, **DO NOT** use wrench or other tools to tighten. **DO NOT** use abrasive cleansers or chemicals. Use only water with mild soap and a non-abrasive sponge.

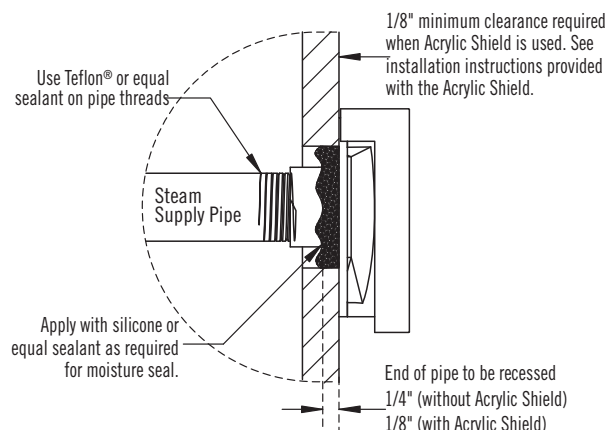

**CAUTION** Consult with supplier of acrylic, fiberglass and other non-heat resistant enclosures for recommended steamhead location. Use Acrylic Shield PN 103938/ 103938SQ. See instructions provided with steam shield. (An acrylic shield is not available for the iSteam steamhead.)

**FOR ILLUSTRATIVE PURPOSES ONLY. IMPORTANT NOTE: FOR SAFE AND TROUBLE FREE INSTALLATION** visit [mrsteam.com](http://mrsteam.com) before installation to download the Installation, Operation and Maintenance Manual or refer to the manual provided with the unit.

| MODEL                           | FINISH                                        | PROJECT INFORMATION |
|---------------------------------|-----------------------------------------------|---------------------|
| <input type="checkbox"/> 104515 | <input type="checkbox"/> BB Brushed Bronze    | Location:           |
| <input type="checkbox"/> 104516 | <input type="checkbox"/> BL Brilliant Black   | Architect:          |
| <input type="checkbox"/> 104518 | <input type="checkbox"/> BN Brushed Nickel    | Engineer:           |
|                                 | <input type="checkbox"/> MB Matte Black       | Contractor:         |
|                                 | <input type="checkbox"/> NB Nouveau Bronze    | Submitted By:       |
|                                 | <input type="checkbox"/> OB Oil Rubbed Bronze | Date:               |
|                                 | <input type="checkbox"/> PB Polished Brass    | Notes:              |
|                                 | <input type="checkbox"/> PC Polished Chrome   |                     |
|                                 | <input type="checkbox"/> PG Polished Gold     |                     |
|                                 | <input type="checkbox"/> PN Polished Nickel   |                     |
|                                 | <input type="checkbox"/> SB Satin Brass       |                     |
|                                 | <input type="checkbox"/> SG Satin Gold        |                     |
|                                 | <input type="checkbox"/> SN Satin Nickel      |                     |
|                                 | <input type="checkbox"/> ST Satin Steel       |                     |
|                                 | <input type="checkbox"/> WH White Finish      |                     |


## Linear Steam Head®

- Quiet, even distribution of steam
- No field assembly required
- Finished Look
- No moving parts
- Minimal profile
- Aroma Feature

### Linear Steamhead Installation: (3/4" NPT)

**IMPORTANT:** Do not disassemble steamhead. MrSteam's steamhead is shipped fully assembled and requires no additional assembly. Locate steamhead 6-12 inches above floor, except for tub/shower enclosures; install 6 inches above tub top edge.

- CAUTIONS** Because the steamhead and direct steam emissions are very hot, locate the steamhead where incidental contact by bather with the steamhead or direct steam emission cannot occur.
- Linear Steam Head model 104480 is suitable for MrSteam generator models MS90-400, MSSUPER1-3 and MX4-MX6.
  - Two 104480 linear steamheads must be used for models MX4, 5 & 6.
  - Using model 104480 for any steam generator model larger than the MX6, or for any non MrSteam brand generators may result in an improper installation or hazardous condition.
  - For residential use only.
  - Install in a upright orientation only. Installation in a any other orientation may concentrate the steam and result in excessive temperatures.

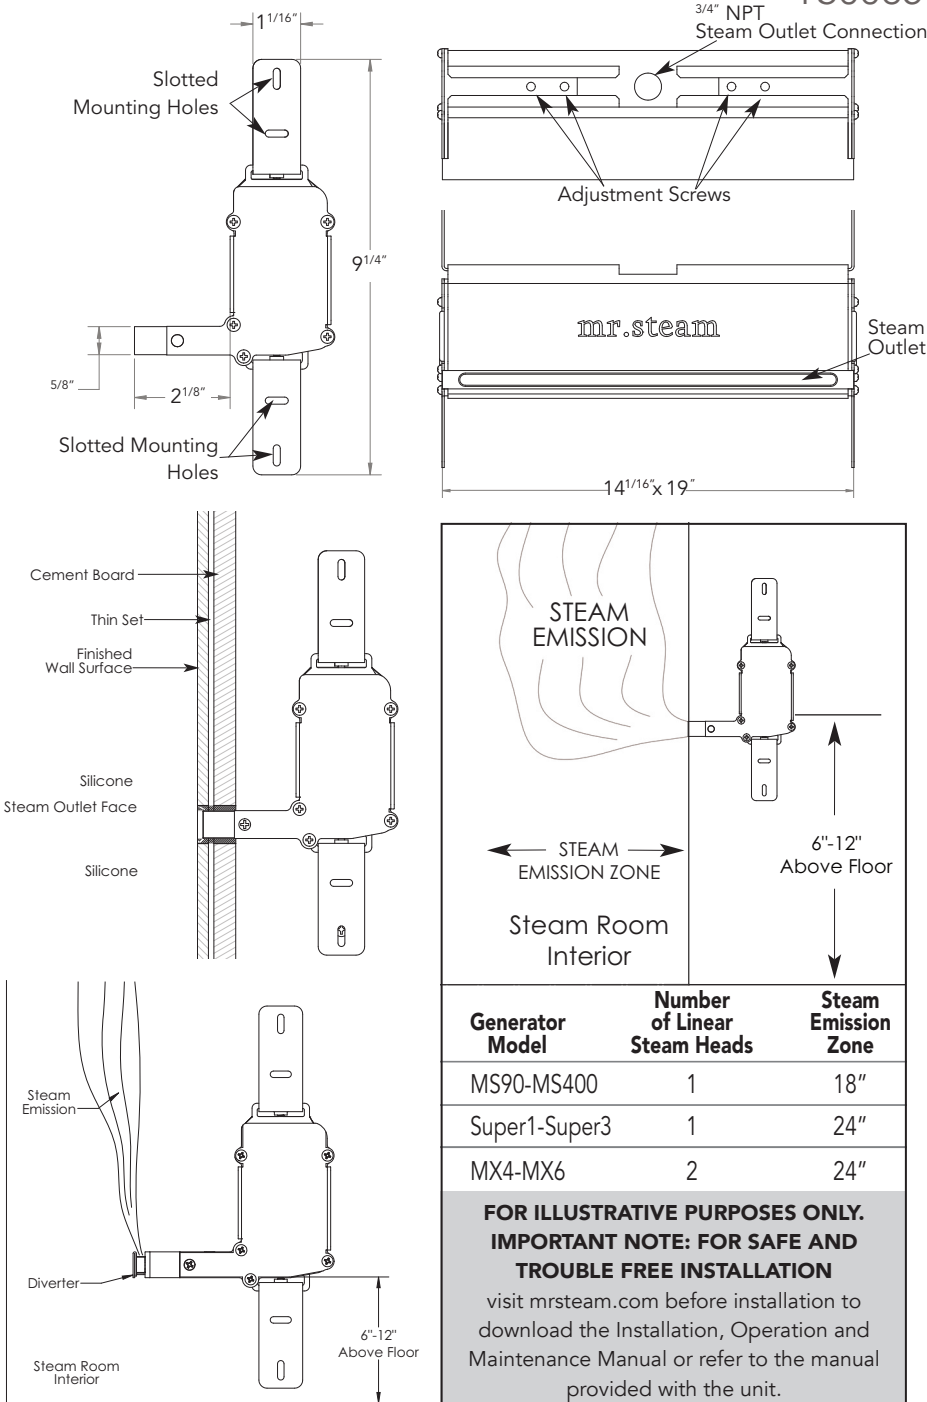

| MODEL                                                                                                                                                                                                                                                                                                                                                                   | PROJECT INFORMATION |               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------|
| 104480<br><input type="checkbox"/> BB <input type="checkbox"/> BN <input type="checkbox"/> MB <input type="checkbox"/> ORB<br><input type="checkbox"/> PB <input type="checkbox"/> PC <input type="checkbox"/> PN <input type="checkbox"/> SB<br><small>One 104495 may be used with MX4, MX5 &amp; MX6. See technical specification TS0088 for more information</small> | Location:           | Contractor:   |
|                                                                                                                                                                                                                                                                                                                                                                         | Architect:          | Submitted By: |
|                                                                                                                                                                                                                                                                                                                                                                         | Engineer:           | Date:         |
|                                                                                                                                                                                                                                                                                                                                                                         | Notes:              |               |

Linear Steam Head®

TS0085

Accessories


**CAUTIONS** because the Steam Head, Faceplate, Diverter, AromaTray, Escutcheon, Finished Diverter, and direct steam emission are very hot, locate the Steam Head, Faceplate, Diverter, AromaTray, Escutcheon, Finished Diverter where incidental contact by bather or direct steam emission cannot occur.

Included Accessories


Faceplate



AromaTray  
(Black Chrome Finish Only)




Diverter  
(Stainless Steel Finish Only)

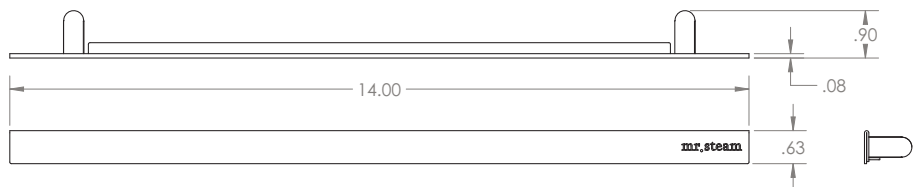


Optional Accessories

Escutcheon

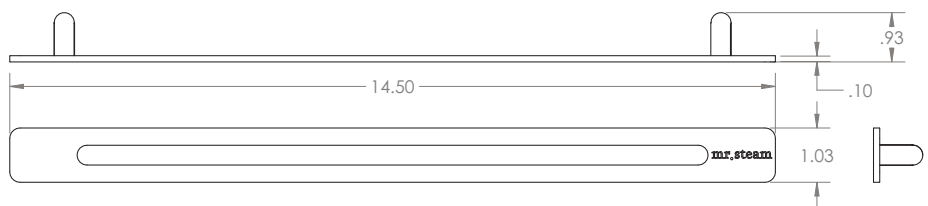

Diverter - Finished

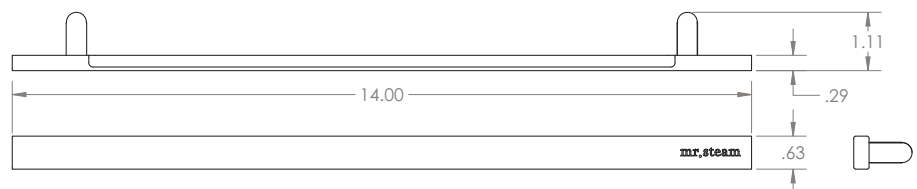

☐ BB

☐ BN

☐ MB

☐ ORB

☐ PB

☐ PC

☐ PN

☐ SB

**NOTE:** Drawings are for illustrative purposes only. Consult with qualified designer, architect or contractor for steam room construction.

TS0085 Rev 5.23


# Condensation Pan

103867 & 104402

Mr.Steam strongly recommends the use of a condensation pan in the unlikely event of a plumbing leak.

Locate the condensation pan on a solid level surface and place the steam generator inside the condensation pan. Insure the steam generator is level.

All plumbing shall be performed by a qualified licensed plumber and in accordance with applicable national and local codes. Check local plumbing code for receptor, trap and vent requirements. Condensation pans drain by gravity. The condensation pan is equipped with an integral 3/4" NPT fitting.

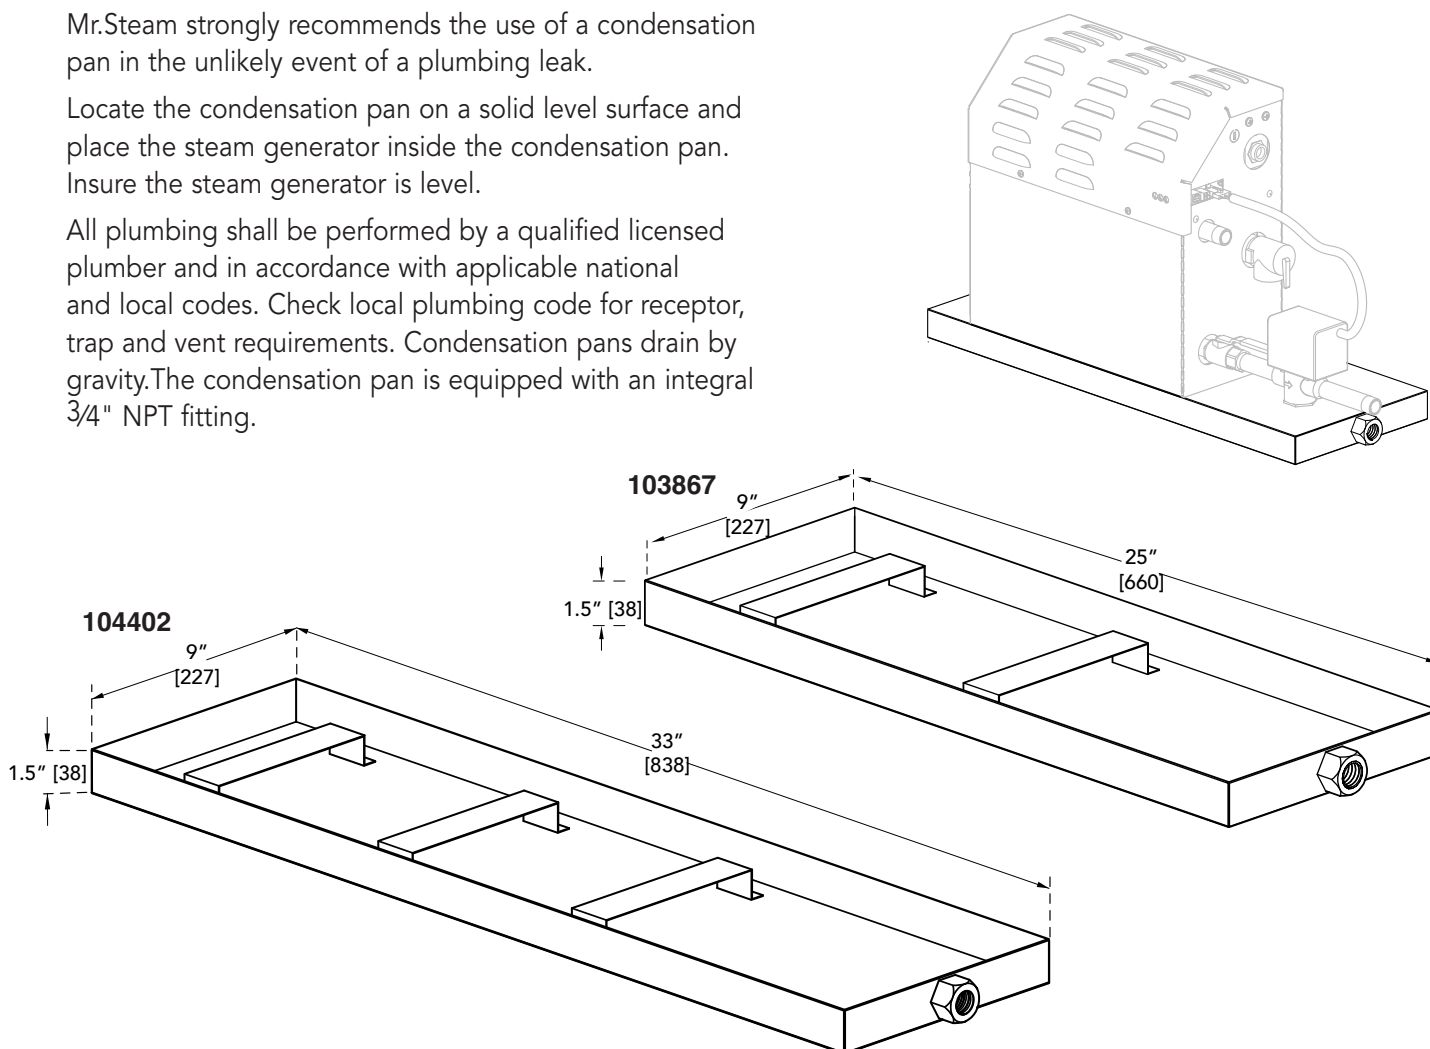

**NOTE:** For MX4E, MX5E and MX6E use model 104402

**FOR ILLUSTRATIVE PURPOSES ONLY. IMPORTANT NOTE: FOR SAFE AND TROUBLE FREE INSTALLATION** visit [mrsteam.com](http://mrsteam.com) before installation to download the Installation, Operation and Maintenance Manual or refer to the manual provided with the unit.

| MODEL                           | PROJECT INFORMATION |               |
|---------------------------------|---------------------|---------------|
| <input type="checkbox"/> 103867 | Location:           | Contractor:   |
| <input type="checkbox"/> 104402 | Architect:          | Submitted By: |
|                                 | Engineer:           | Date:         |
| Notes:                          |                     |               |

### AutoFlush®

#### Box Contents


- AutoFlush Valve with Cord
- Installation instructions

#### Operation

The optional AutoFlush System feature automatically drains the MrSteam system following each use. A time delay allows the water to cool down (about two hours) before it drains by gravity for a safe and gentle operation.

**Note:** If the Express Steam® option has been installed, the AutoFlush will drain for ten minutes then refill with fresh water to begin the pre-heat cycle.

#### AutoFlush Shown Fully Assembled

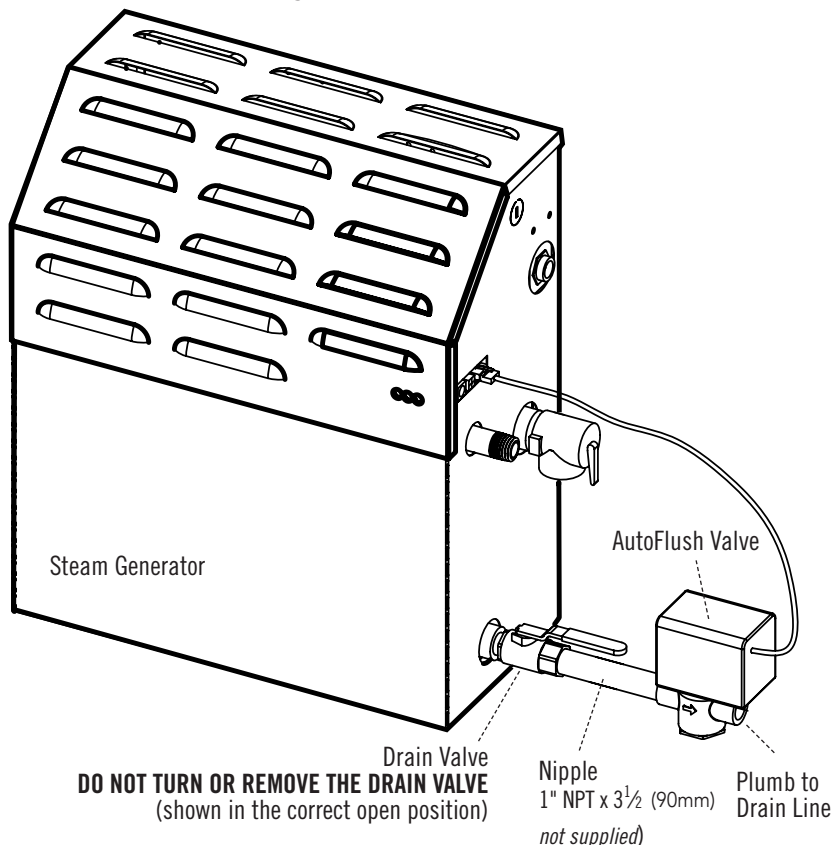

Our exclusive AutoFlush automatically and electronically drains the system, providing CleanSteam... Every Time® and introduces fresh water.

**FOR ILLUSTRATIVE PURPOSES ONLY. IMPORTANT NOTE: FOR SAFE AND TROUBLE FREE INSTALLATION** visit [mrsteam.com](http://mrsteam.com) before installation to download the Installation, Operation and Maintenance Manual or refer to the manual provided with the unit.

| MODEL     | PROJECT INFORMATION |               |
|-----------|---------------------|---------------|
| MS 81500E | Location:           | Contractor:   |
|           | Architect:          | Submitted By: |
|           | Engineer:           | Date:         |
| Notes:    |                     |               |