
Como 4-180 INDOOR SAUNA

INSTALLATION MANUAL



Layout Plan: * minimum space required for installation WALL B (BACK) 1810 1692 To place the sauna in a corner, assemble the wall logs first, then push it against the walls. I 7 * 600 MM 720 MM 526 526 WALL C (RIGHT) 1030 WALL A (LEFT) 1353 400 496 700 496 WALL D (FRONT)

Cross Section:

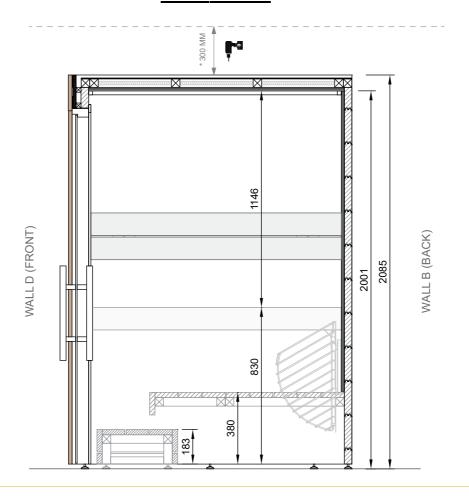

DETAILS LIST - Wall Logs:

Marking	Detail	Note	Length	Pcs.
007	40x188 Wall Log		1732	10+1*
006	40x85 Wall Log	(i)	1732	1
800	40x118 Wall Log		1732	1
005	40x118 Wall Log		1732	1
000	40x188 Wall Log	extra side wall logs (use only if nescessary)	1487	2*
010	40x188 Wall Log		1460	10
009	40x175 Wall Log	M	1460	1
011	40x93 Wall Log		1460	1
013	40x188 Wall Log		1460	10
012	40x175 Wall Log	M .	1460	1
014	40x93 Wall Log		1460	1
004	40x188 Wall Log		516	10
002	40x85 Wall Log	M	516	1
003	40x188 Wall Log	_	516	10
001	40x85 Wall Log		516	1
	Hitting Block			2

Facade:

P-1	27x27 Vertical post	2060	4
P-2	27x27 Horizontal post	690	2
	19x40 Decorative grooved slats	2060	24+4*
	19x40 Decorative grooved slats	190	11+1*
	Facade panel: LEFT	536 x 2060	1
	Facade panel: RIGHT	536 x 2060	1
	Facade panel: CENTER	698 x 178	1

Ceiling:

Ceiling element 1	969 x 1431	1
Ceiling element 2	719 x 1431	1

Doors:

U-1	Glass Door 88x690x1880	1
	Door handle	1
	Screw Cover Caps	8

Moldings, Tapes, Sealing strips:

DI-0	21x21 Ceiling Molding	Cut to length!	~2100	4
UL-1	12x42 Door Molding	Cut to length!	2200	3
	Rubber Sealing Strip	For ceiling elements	2,8 m	1

^{*} Spare parts included for replacement in case of damage or missing components.

DETAILS LIST - Sauna Benches:

Marking	Detail	Note	Length	Pcs.
	Top Bench		500 x 1332	2
	Bottom Bench 1		630 x 1684	1
	Bottom Bench 2		400 x 1684	1
	Step Bench		400 x 800	1
	Bench Horizontal Support Set 45x45			1
	Backrest		246 x 1332	2


Fasteners and Accesories:

Adjustable Leg M8x40	+ rubber pads	Ø 38 mm	14
Plastic Fixing Clips	for decorative slats		104+1*
Screw 6x13.5	for fixing clips		104+1*
Screw 4.5x70			100
Screw 4.5x60			250
Screw 3.5x50			5
Lost- Head Nail 40 mm			100
Ventilation Valve Ø100			1


Optional Extras - If Ordered Additionally:

Decorative Back Wall Panel		1684 x 1593	1
LED Lighting Set 2	for top benches		1
LED Lighting Set 6	for top benches and backrests		1

^{*} Spare parts included for replacement in case of damage or missing components.

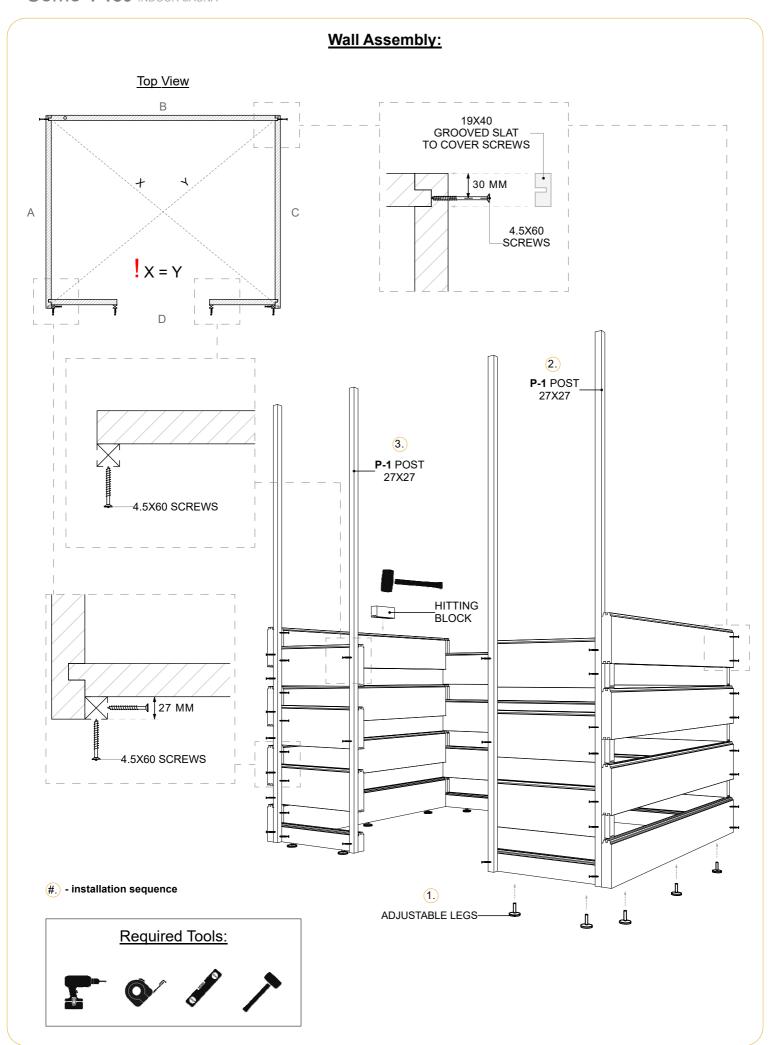

Wall Layout: B Continue stacking the wall logs according to the layout plan. A۰ **∢**C Top View As you proceed, ensure that the pre-drilled cable conduit drillings are properly aligned. To make ceiling installation easier, do not install the top wall log on the right wall at this stage. WALL D (FRONT) **WALL A (LEFT)** VIEW FROM THE OUTSIDE VIEW FROM THE OUTSIDE INSTALL THE LAST WALL LOG AFTER THE CEILING ELEMENTS WALL C (RIGHT) WALL B (BACK) HAVE BEEN FITTED. VIEW FROM THE INSIDE VIEW FROM THE OUTSIDE -CABLE CONDUIT

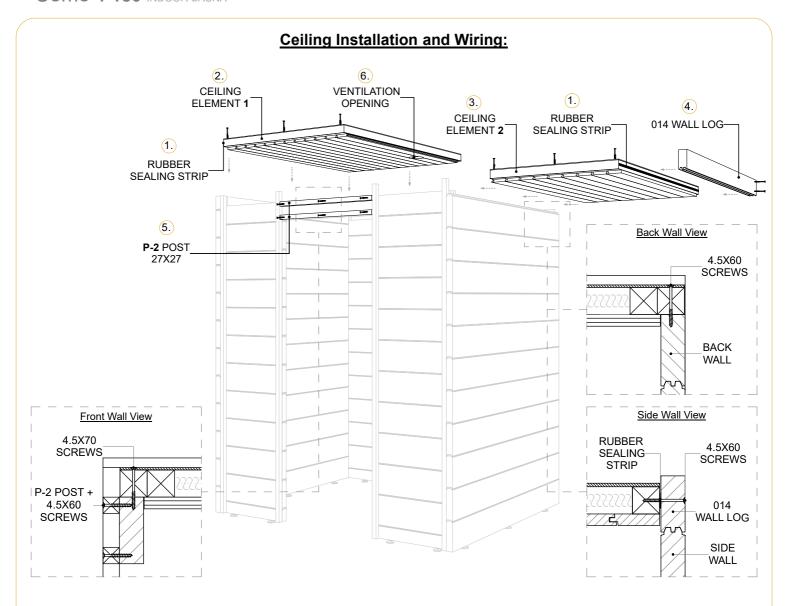

Electrical Wiring:


Choose the preferred side for installing the sauna controller, and plan the placement of the temperature sensors to ensure accurate readings and optimal performance.

Route the electrical wiring for the control panel, sensors and LED lighting under the sauna benches and behind the backrests (if ordered additionally) across the ceiling and along the front walls.

Complete these steps before attaching the facade panels.

Connect the main power cable to the LED lighting wiring in the junction box.

The junction box can be placed on top of the ceiling elements for easy access and concealment, or in any other accessible location depending on site conditions.

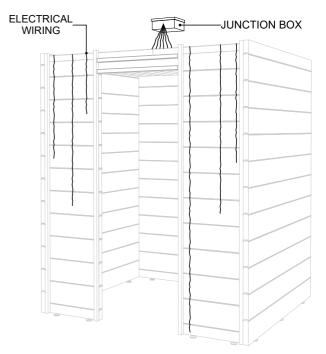


Electrical installation must be carried out by a certified electrician to ensure safety and compliance with local regulations.

Fixing Clip Mounting Layout:

Confirm that all electrical conduits, wiring, and associated components are completely installed, tested, and approved in their final locations prior to fixing the facade panels in place.

Attach the fixing clips to the facade panels using 6×3.5 mm screws, following the provided layout.


Ensure each clip is positioned correctly—the screw placement affects the spacing, so pay close attention to maintain even gaps between the decorative slats.

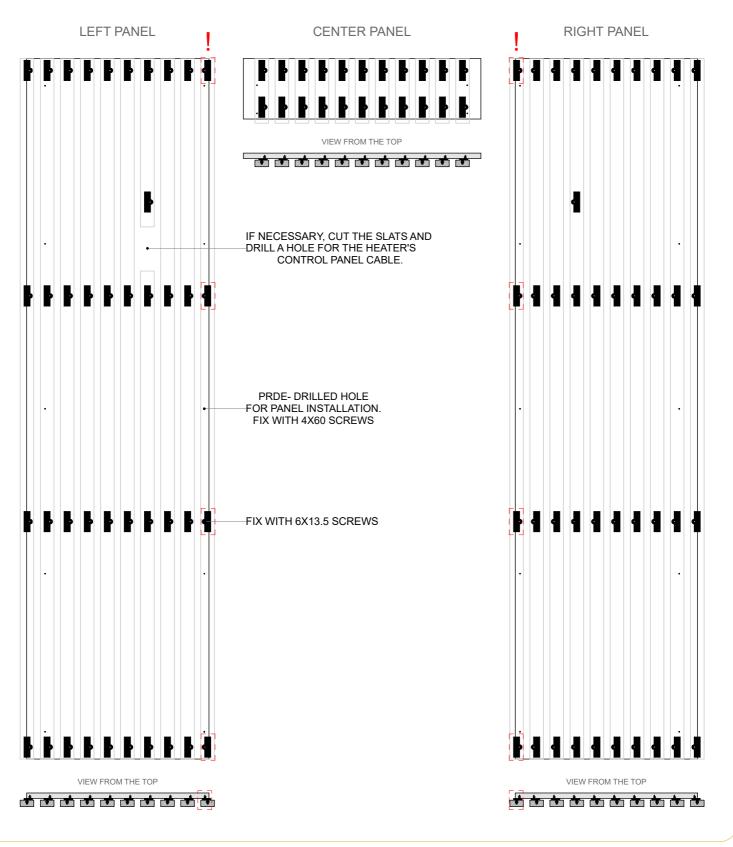


Door and Facade Panel Installation: (3.) Top View (4.) (2.) RIGHT PANEL LEFT PANEL CENTER PANEL-В 0000000000000 } 1 Note: To change the door's opening direction, simply flip the door and Α С reposition the upper frame accordingly. 1888888888 0000000000000 100000000 }00000000 **SCREW** 4.5X70 COVER SCREWS **CAPS** THUM 11111111 (1. 4.5X60 **SCREWS** GLASS DOOR **Decorative Slats:** 6.) (5.) SIDE WALL FRONT WALL SLATS SLATS 40 MM LOST HEAD NAIL 40 MM LOST HEAD NAIL

Snap the decorative slats into place. Please note that they are not intended to be removed and reinstalled. In case of installation errors, four long and one short spare piece are included.

Back Wall Panel, Ventilation, and Bench Supports

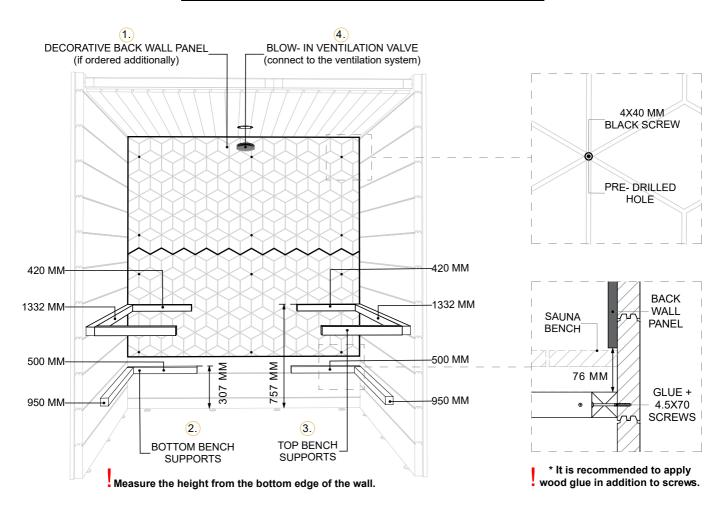

Sauna Benches and Moldings

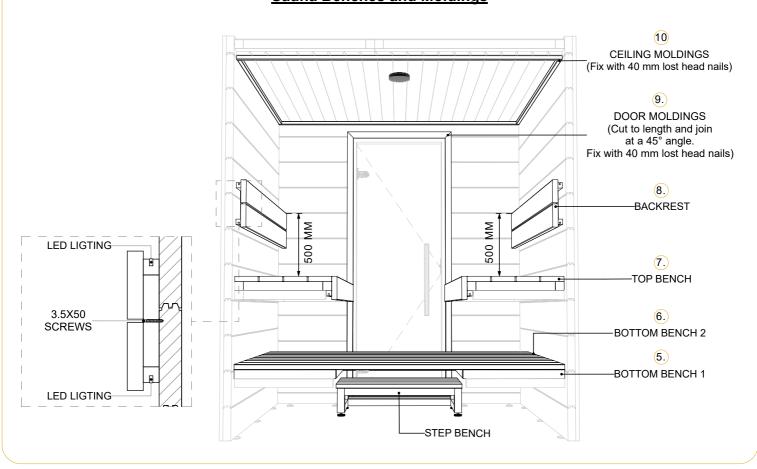

Safety Requirements and Maintenance

Safety Requirements for Indoor Sauna

Electrical Safety:

Only a certified electrician should install or service the sauna heater.

Use a properly grounded, sauna-rated power supply. Do not use extension cords or power strips.

Ventilation:

Ensure adequate ventilation to allow fresh air circulation and prevent overheating or humidity buildup. Proper ventilation ensures a steady flow of fresh air, helps maintain a consistent temperature, removes excess humidity, and prevents mold or wood damage.

Heater Placement & Use:

Keep flammable materials (e.g. towels, paper, clothing) away from the heater.

Never cover the heater or place objects on it.

Follow the manufacturer's guidelines for sauna stone placement.

User Safety:

Limit sauna sessions to 15–20 minutes.

Stay hydrated and exit immediately if you feel dizzy, nauseated, or uncomfortable.

Children must be supervised at all times.

Pregnant individuals and people with heart conditions should consult a doctor before use.

Fire Safety:

Keep a smoke detector and fire extinguisher nearby (outside the sauna room).

Do not use candles or open flames inside the sauna.

Maintenance Guidelines for Indoor Sauna

After Use:

Leave the door open to allow moisture to escape and air to circulate.

Wipe down benches and walls with a damp cloth to remove sweat and residue.

Weekly inspect the heater and stones for cracks or displacement.

Clean the floor to remove dirt and debris.

Monthly check for signs of mold or mildew and clean with a mild sauna-safe disinfectant if needed.

Tighten screws and fittings if any parts have loosened.

Annually replace sauna stones if they are cracked or crumbling.

Have a licensed technician inspect the electrical components and heater performance.

General Tips:

Avoid harsh cleaners; use only non-toxic, sauna-safe products.

Use towels on benches to reduce sweat buildup and protect wood surfaces.

Re-oil or lightly sand wooden surfaces if they become dry or splintered (only with appropriate products).